

# FLOWTITE PRODUCTS

## GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED  
"ASTM C-1644" APPROVED  
FLEXIBLE PIPING COUPLING  
REQUIRED ON TANGENTIALLY  
MTD. NOZZLES, & PIPES



SHELL CODES: 2-EXS07SD



THIS IS AN IAPMO APPROVED TANK  
COMPLIANCE STANDARDS AND CODES:  
IAPMO/ANSI Z1001  
UNIFORM PLUMBING CODE (UPC)  
INTERNATIONAL PLUMBING CODE (IPC)  
MFG. PER PE-C22.85

**CAPACITIES:**

LIQUID OPERATING CAPACITY = 11085 GALS  
FREE SURFACE AREA OF LIQUID = 247 SQ/FT  
GREASE/FOG STORAGE = 5725 GALS/43510 LBS

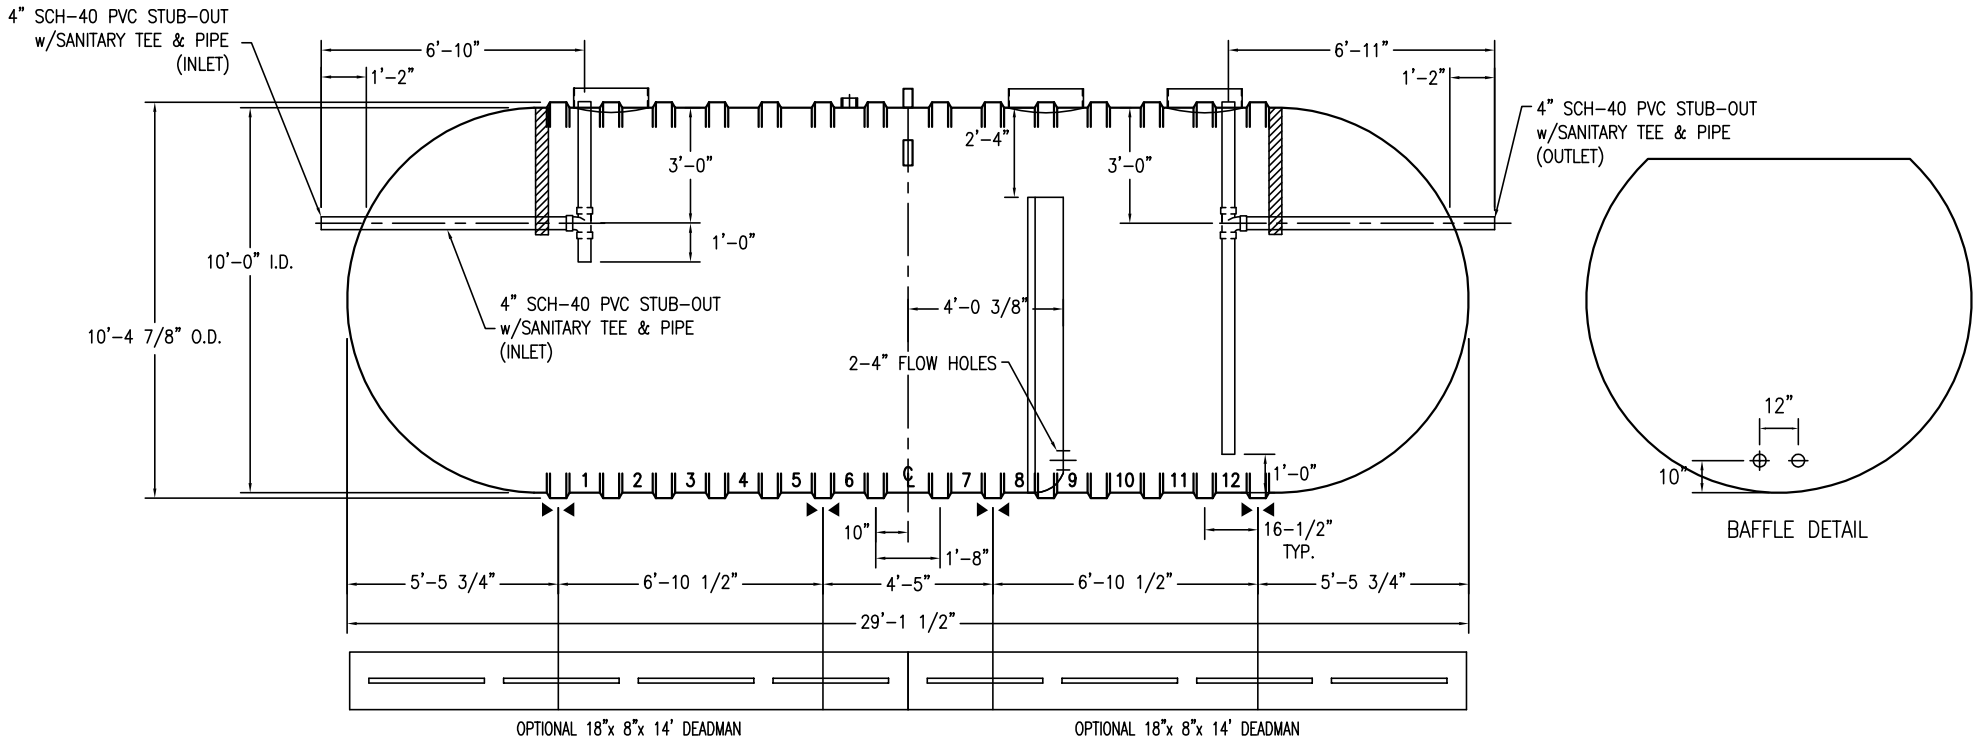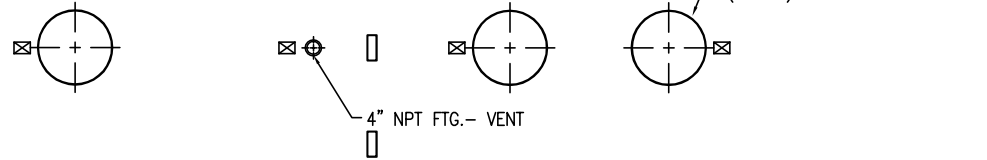

**NOTES:**

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D6 (10')-11100 2B-IG		DATE:	1/1/2014	
IAPMO GREASE INTERCEPTOR		DRAWN BY:	R.MOEN	
<b>CONTAINMENT SOLUTIONS</b>	CAPACITY:	15,104	REVISED:	02/01/17-A
	WEIGHT: DRY/WET	5000	DWG NUMBER:	1011MSW-IG