

FLOWTITE PRODUCTS

GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED
"ASTM C-1644" APPROVED
FLEXIBLE PIPING COUPLING
REQUIRED ON TANGENTIALLY
MTD. NOZZLES, & PIPES


SHELL CODES: 2-EXS10SD, 2-OXS09SD



THIS IS AN IAPMO APPROVED TANK
COMPLIANCE STANDARDS AND CODES:
IAPMO/ANSI Z1001
UNIFORM PLUMBING CODE (UPC)
INTERNATIONAL PLUMBING CODE (IPC)
MFG. PER PE-C22.85

CAPACITIES:
LIQUID OPERATING CAPACITY = 25389 GALS
FREE SURFACE AREA OF LIQUID = 566 SQ/FT
GREASE/FOG STORAGE = 13650 GALS/103740 LBS

24" (23.5"O.D.) ACCESS COLLAR
w/ADHESIVE CHANNEL &
22 1/2" TANK TOP CUT-OUT
(3 TYP.)

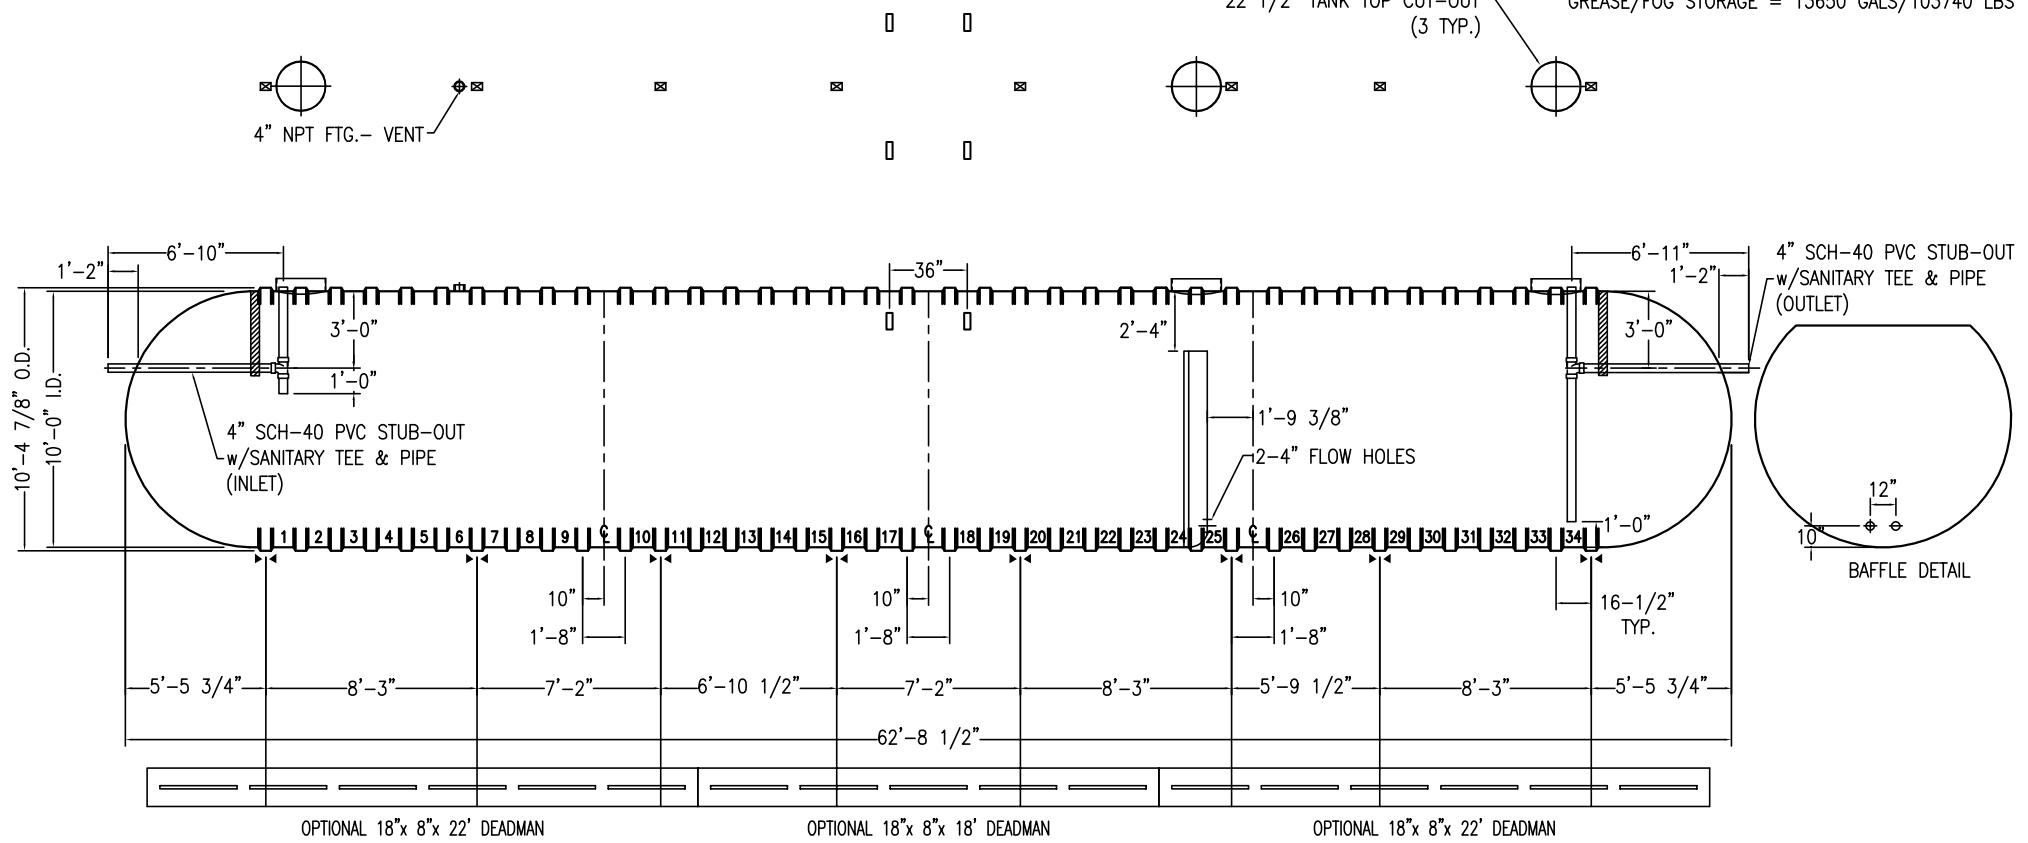

- NOTES:**
- ☒ HOLD DOWN STRAP CLIP
 - ▶◀ HOLD DOWN STRAP LOCATION
 - TYPE "13" LIFT LUG - SD
 - TYPE "13" LIFT LUG - HD

SWT D6 (10') 25400 2B-IG		DATE: 1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY: R.MOEN
CONTAINMENT SOLUTIONS	CAPACITY: 34,835	REVISED: 02/01/17-A
	WEIGHT: DRY/WET 10300	DWG NUMBER: 1025MSW-IG