

FLOWTITE PRODUCTS

GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED
"ASTM C-1644" APPROVED
FLEXIBLE PIPING COUPLING
REQUIRED ON TANGENTIALLY
MTD. NOZZLES, & PIPES



SHELL CODES: 1-E4S120S2, 1-E4SECS2



THIS IS AN IAPMO APPROVED TANK
COMPLIANCE STANDARDS AND CODES:
IAPMO/ANSI Z1001
UNIFORM PLUMBING CODE (UPC)
INTERNATIONAL PLUMBING CODE (IPC)
MFG. PER PE-C22.85

CAPACITIES:

LIQUID OPERATING CAPACITY = 859 GALS
FREE SURFACE AREA OF LIQUID = 28 SQ/FT
GREASE/FOG STORAGE = 209 GALS/1588 LBS

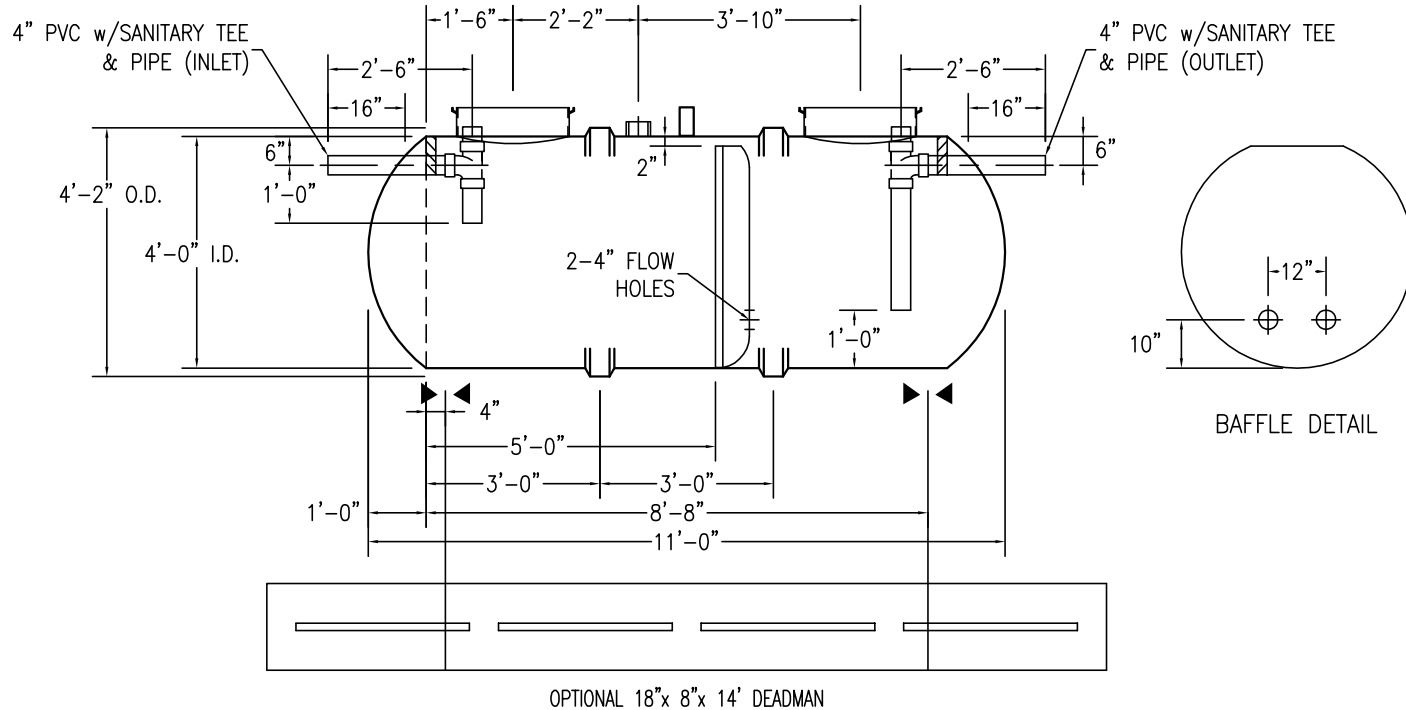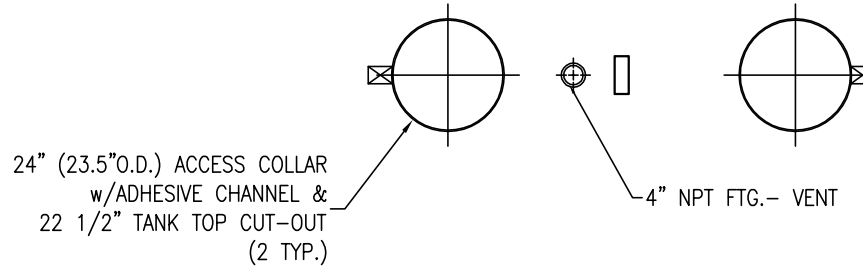

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D5 (4')-900 2B-IG		DATE:	1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY:	K.A.SOEDER
CONTAINMENT SOLUTIONS S.	CAPACITY:	REVISION:	02/01/17-A
	WEIGHT: DRY/WET	DWG NUMBER:	4900SW-IG
	966		
	500		