

FLOWTITE PRODUCTS

SEPTIC/WASTE WATER

NOTE: CUSTOMER SUPPLIED "ASTM C-1644" APPROVED FLEXIBLE PIPING COUPLING REQUIRED ON TANGENTIALLY MTD. NOZZLES, & PIPES

SHELL CODES: 1-E6S08SD, 1-E6SECS




THIS IS AN IAPMO APPROVED TANK THE ONLY CHANGE ALLOWED TO THIS TANK IS TO INCREASE THE INLET AND OUTLET PIPE DIAMETER. MFG. PER. PE-C22.85

CAPACITIES:



LIQUID VOLUME BELOW OUTLET = 2,323 GALS
AIR VOLUME ABOVE OUTLET = 366 GALS

(24") 23-1/2" O.D. FRP ACCESS COLLAR w/ADHESIVE CHANNEL & 22 1/2" TANK TOP CUT-OUT (2 TYP.)

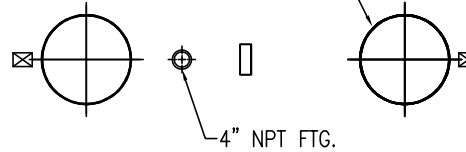

4" SCH-40 PVC STUB-OUT w/SANITARY TEE & PIPE (INLET)

4" SCH-40 PVC STUB-OUT w/SANITARY TEE & PIPE (OUTLET)

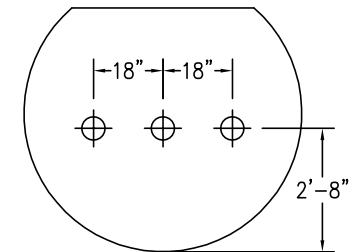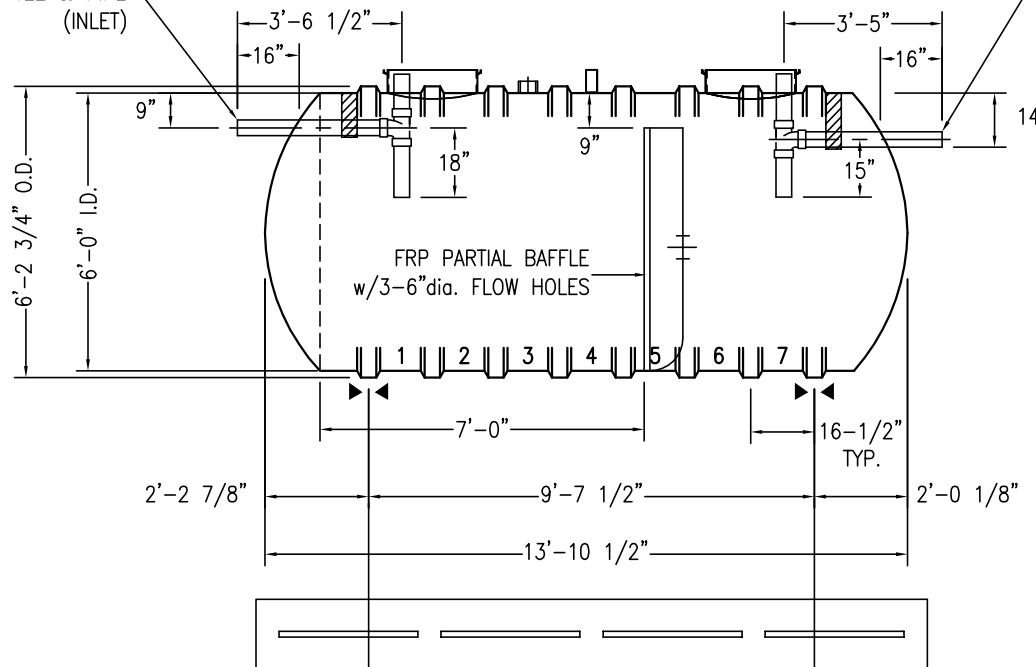

"BAFFLE DETAIL"

OPTIONAL 18" x 8" x 14' DEADMAN

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D-6 (6')-2500		DATE:	1/1/2014
IAPMO SEPTIC TANK		DRAWN BY:	K.A.SOEDER
CONTAINMENT SOLUTIONS	CAPACITY:	2,689	
	WEIGHT: DRY/WET	1300	
		DWG NUMBER:	625CSW-IS