

FLOWTITE PRODUCTS

GREASE INTERCEPTOR


NOTE: CUSTOMER SUPPLIED
"ASTM C-1644" APPROVED
FLEXIBLE PIPING COUPLING
REQUIRED ON TANGENTIALLY
MTD. NOZZLES, & PIPES

SHELL CODES: 2-E6S08SD



THIS IS AN IAPMO APPROVED TANK
THE ONLY CHANGE ALLOWED TO
THIS TANK IS TO INCREASE THE
INLET AND OUTLET PIPE DIAMETER.
MFG. PER. PE-C22.85

CAPACITIES:
LIQUID OPERATING CAPACITY = 4438 GALS
FREE SURFACE AREA OF LIQUID = 109 SQ/FT
GREASE/FOG STORAGE = 2294 GALS/17434 LBS

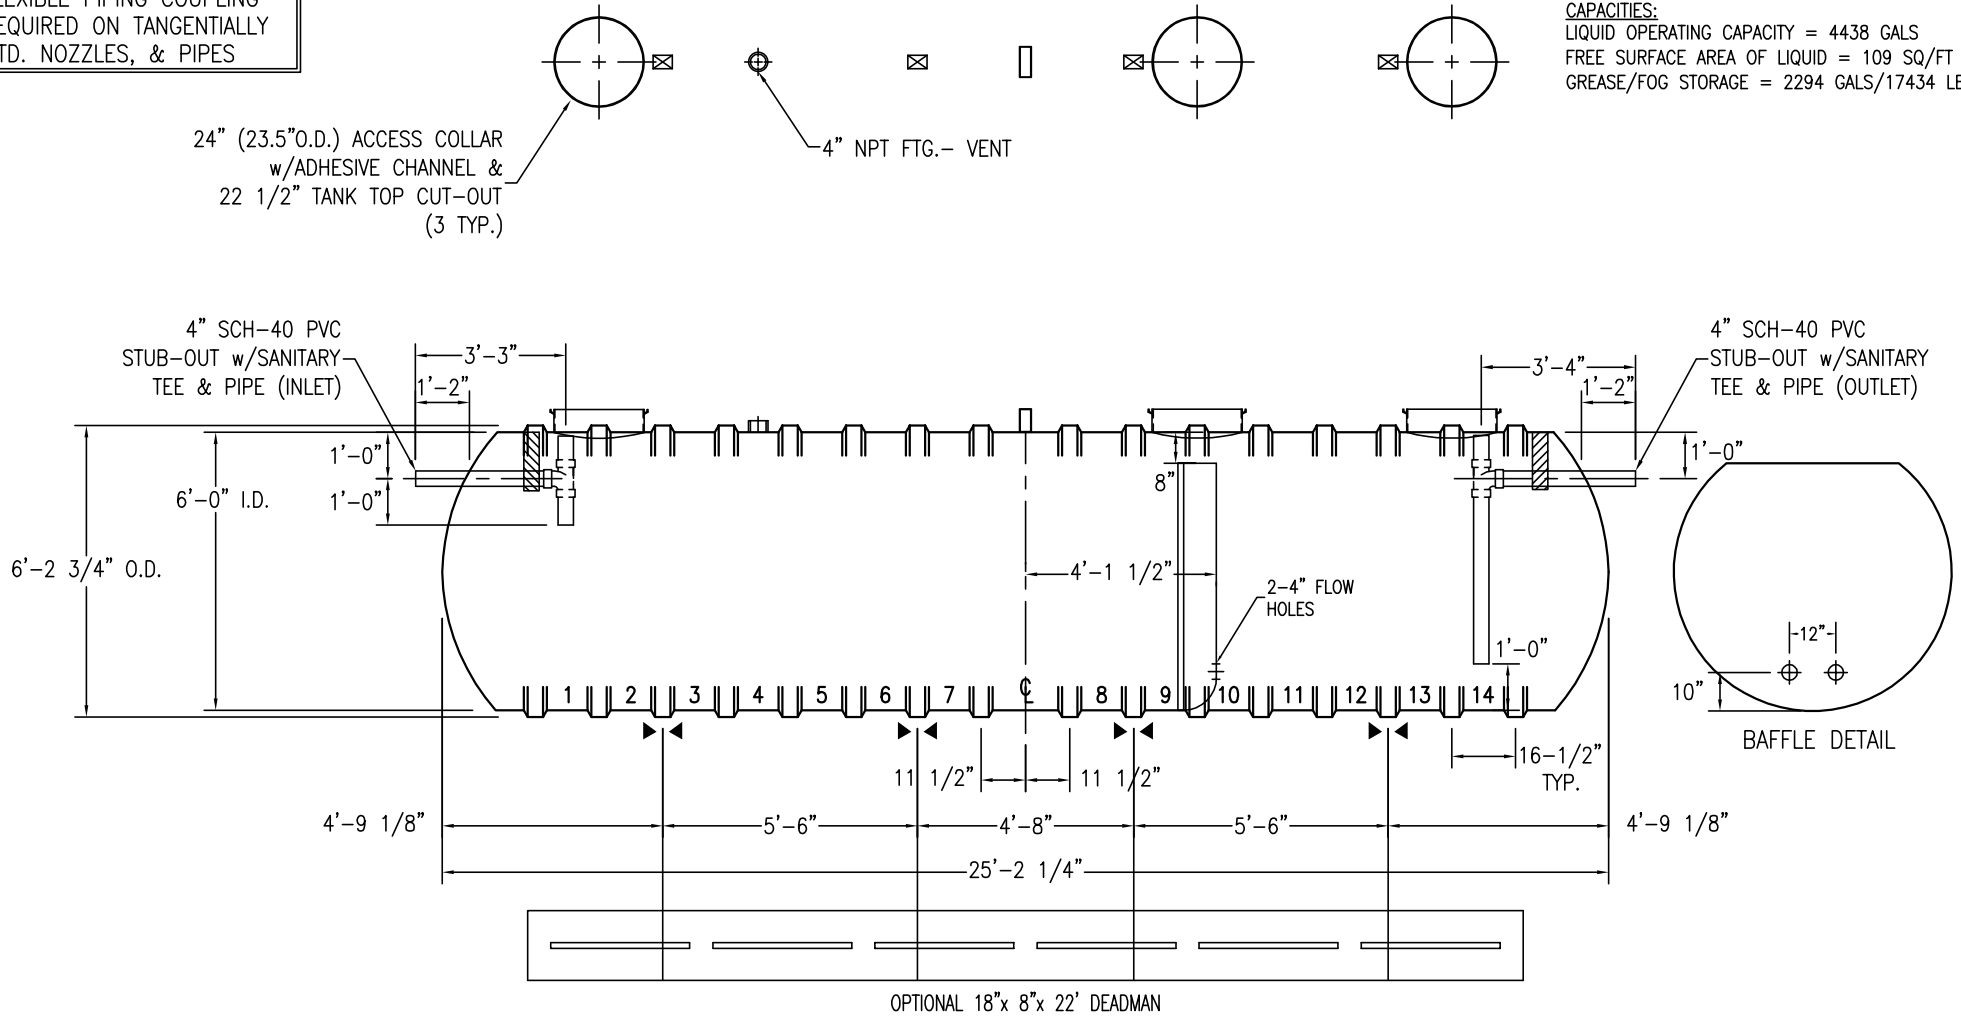

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D6 (6') 4400 2B-IG		DATE: 1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY: R.MOEN
	CAPACITY: 5,108	REVISED:
	WEIGHT: DRY/WET 2150	DWG NUMBER: 644CSW-IG