

FLOWTITE PRODUCTS

GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED
"ASTM C-1644" APPROVED
FLEXIBLE PIPING COUPLING
REQUIRED ON TANGENTIALLY
MTD. NOZZLES, & PIPES

SHELL CODES: 2-E6S09SD




THIS IS AN IAPMO APPROVED TANK
THE ONLY CHANGE ALLOWED TO
THIS TANK IS TO INCREASE THE
INLET AND OUTLET PIPE DIAMETER.
MFG. PER. PE-C22.85

CAPACITIES:
LIQUID OPERATING CAPACITY = 5225 GALS
FREE SURFACE AREA OF LIQUID = 129 SQ/FT
GREASE/FOG STORAGE = 2825 GALS/21470 LBS

24" (23.5"O.D.) ACCESS COLLAR
w/ADHESIVE CHANNEL &
22 1/2" TANK TOP CUT-OUT
(3 TYP.)

4" NPT FTG.- VENT

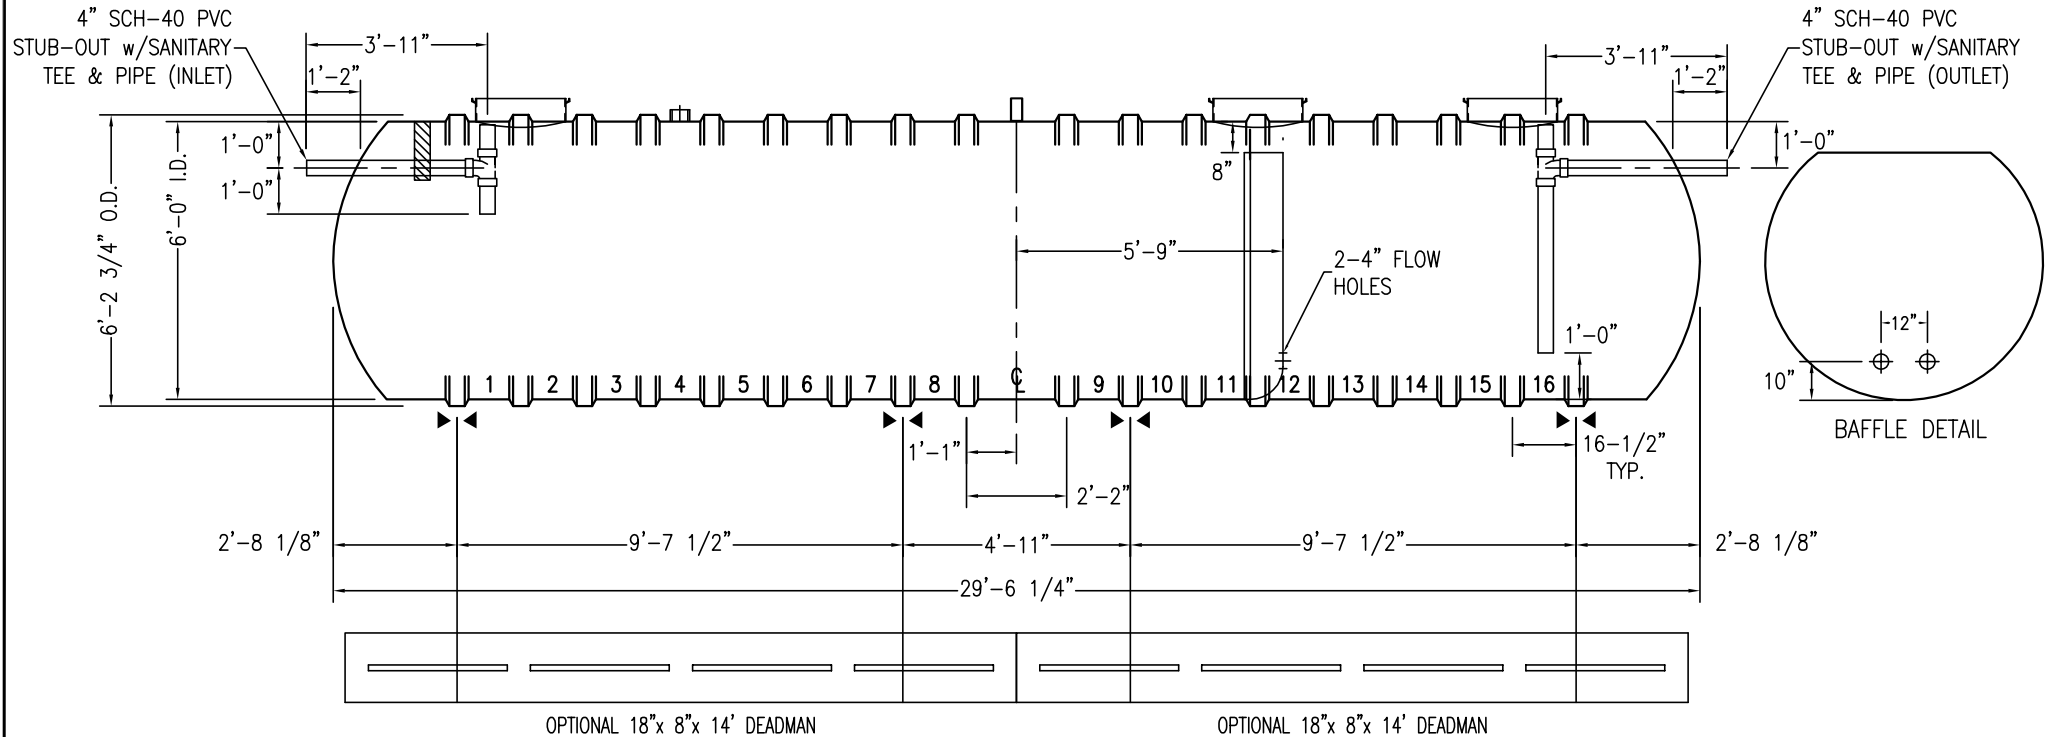

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D6 (6') 5200 2B-IG		DATE: 1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY: R.MOEN
	CAPACITY: 6,038	REVISED:
	WEIGHT: DRY/WET 2450	DWG NUMBER: 652CSW-IG