

FLOWTITE PRODUCTS

GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED
"ASTM C-1644" APPROVED
FLEXIBLE PIPING COUPLING
REQUIRED ON TANGENTIALLY
MTD. NOZZLES, & PIPES

24" (23.5" O.D.) ACCESS COLLAR
w/ADHESIVE CHANNEL &
22 1/2" TANK TOP CUT-OUT
(3 TYP.)

4" NPT FTG.- VENT


SHELL CODES: 2-E8S0928, 1-08S1028



THIS IS AN IAPMO APPROVED TANK
THE ONLY CHANGE ALLOWED TO
THIS TANK IS TO INCREASE THE
INLET AND OUTLET PIPE DIAMETER.
MFG. PER. PE-C22.85

CAPACITIES:

LIQUID OPERATING CAPACITY = 11878 GALS
FREE SURFACE AREA OF LIQUID = 274 SQ/FT
GREASE/FOG STORAGE = 6702 GALS/50935 LBS

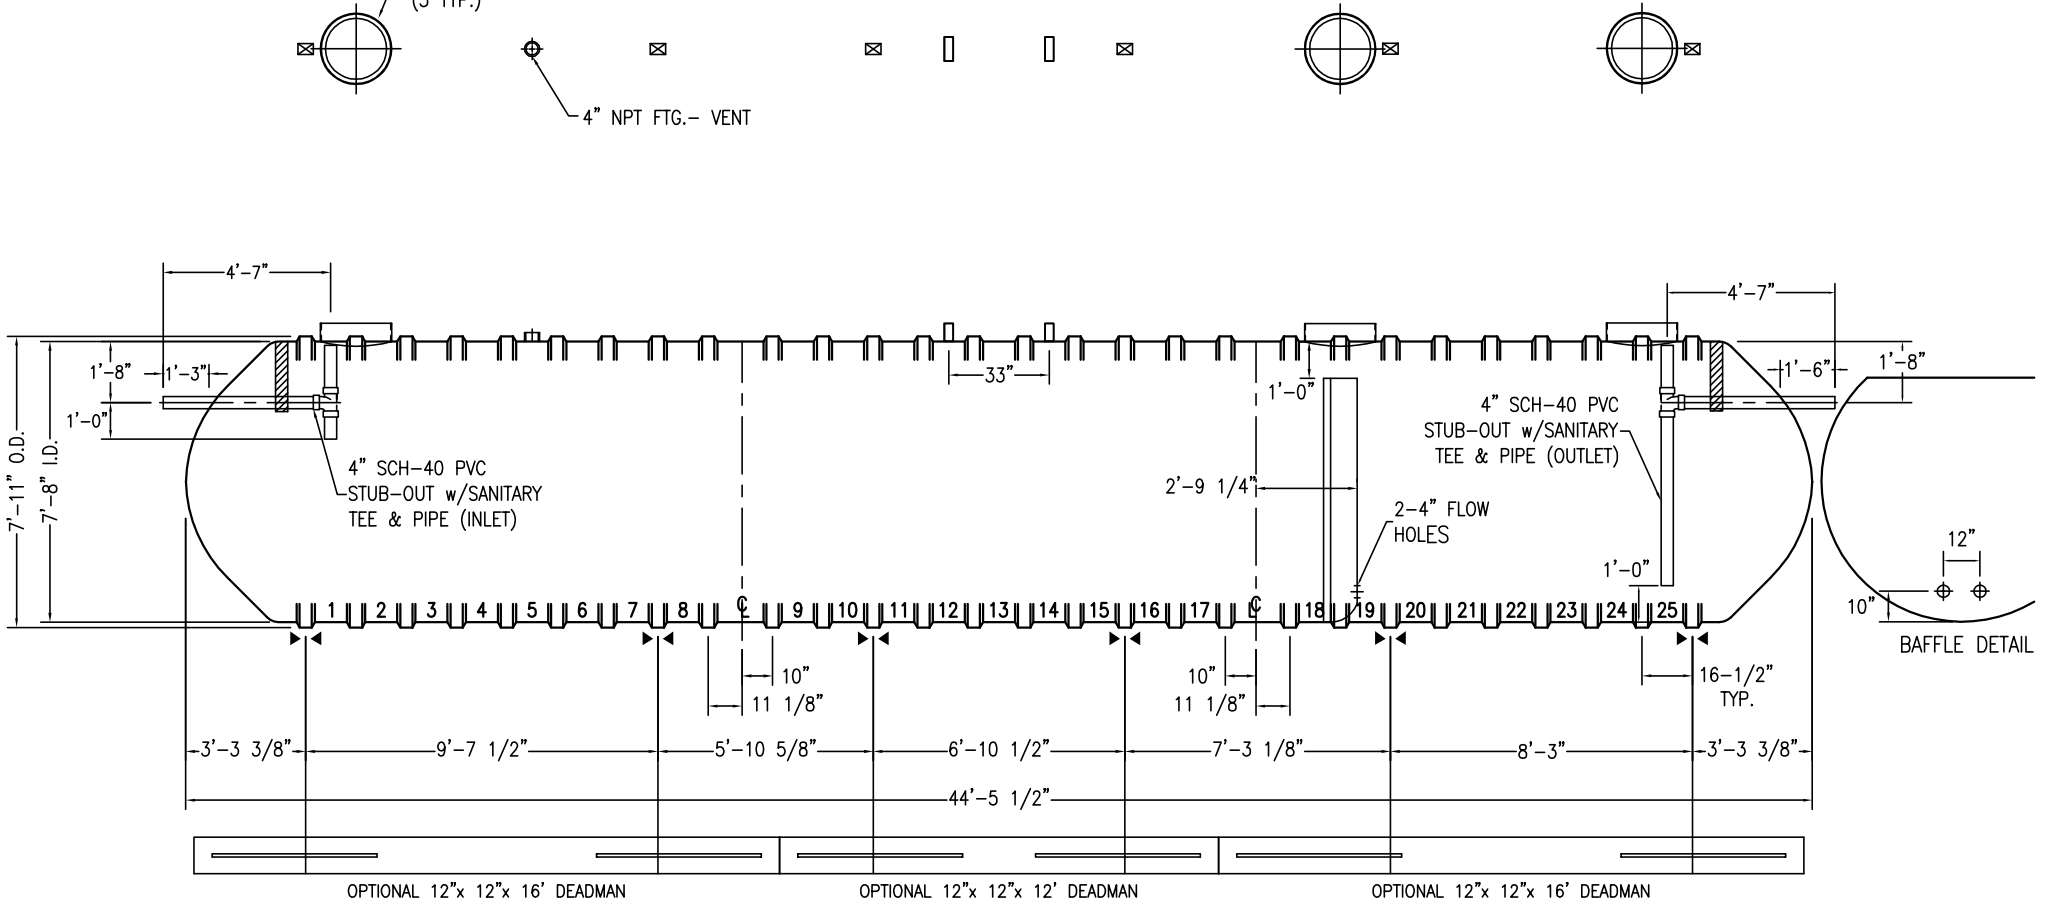

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT G-6 (8')-11900 2B-IG		DATE: 1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY: R.MOEN
CONTAINMENT SOLUTIONS	CAPACITY: 14,545	REVISED:
	WEIGHT: DRY/WET 4700	DWG NUMBER: 812MSW-IG