

FLOWTITE PRODUCTS

GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED
"ASTM C-1644" APPROVED
FLEXIBLE PIPING COUPLING
REQUIRED ON TANGENTIALLY
MTD. NOZZLES, & PIPES



SHELL CODES: 1-E8S10SD, 1-E8SECS



THIS IS AN IAPMO APPROVED TANK
THE ONLY CHANGE ALLOWED TO
THIS TANK IS TO INCREASE THE
INLET AND OUTLET PIPE DIAMETER.
MFG. PER. PE-C22.85

CAPACITIES:

LIQUID OPERATING CAPACITY = 4850 GALS
FREE SURFACE AREA OF LIQUID = 110 SQ/FT
GREASE/FOG STORAGE = 2206 GALS/16766 LBS

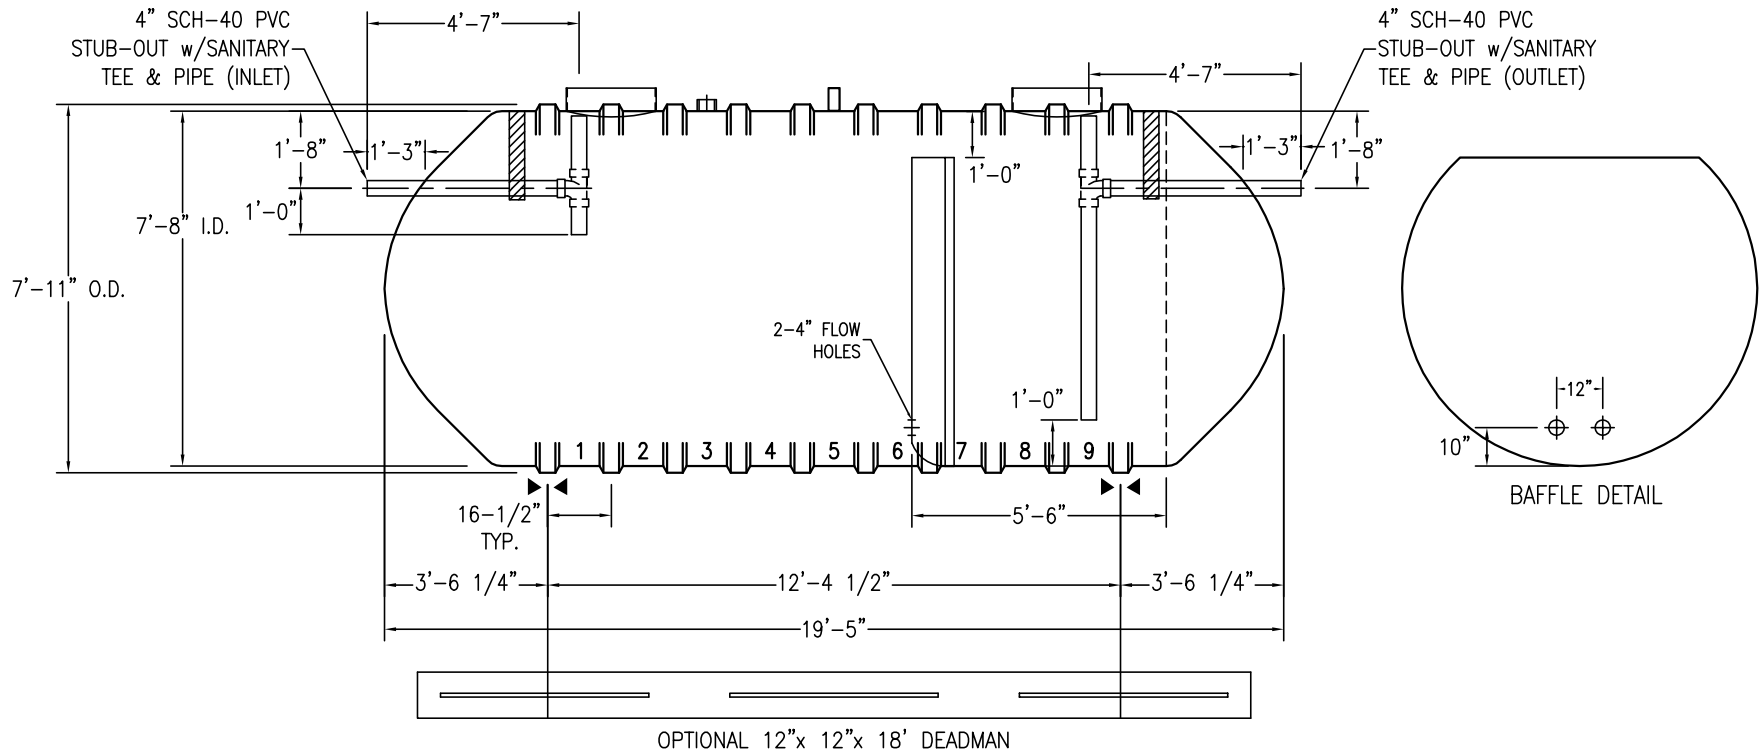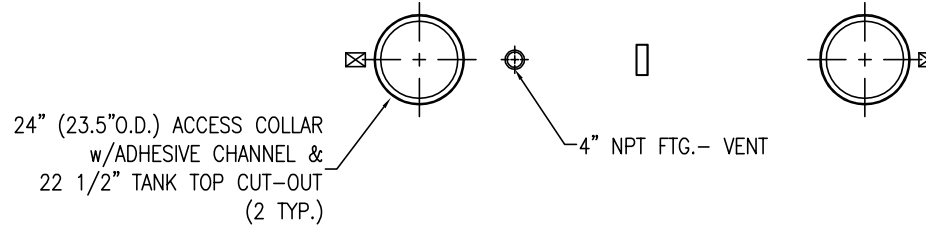

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT G-6 (8')-4900 2B-IG		DATE:	2/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY:	R.MOEN
CONTAINMENT SOLUTIONS	CAPACITY:	REVISION:	
	WEIGHT: DRY/WET	5,897	
	2250	DWG NUMBER:	849CSW-IG